

Installation Instructions


Step 1

Remove the navigation screen and the radio tuner to begin your installation and set them aside.




Step 2

On the **Factory** harness lift the lock tab gently and pull the insert out of the housing




Step 3

On the **Factory** optical insert press the blue lock out to remove it as shown on the drawing




Step 4

On the **UMI** optical plug repeat the previous 2 steps and remove the lock




Step 5

On the **Factory** optical plug lift the tab and allow the optical lead to slide out of the plug on the output side




Step 6

On the **Factory** optical plug insert the optical lead from the input of the UMI connector to the output of the factory connector




Step 7

On the **UMI** optical plug take the optical lead removed from the output of the factory connector and insert it into the output of the UMI connector




Step 8

The final assembly will look like this

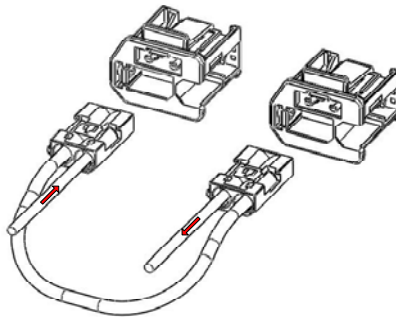


Step 9

Plug back the inserts with the leads into the **UMI** and the **Factory** connector




Step 10

Crimp the black wire to ground and the red wire to 12V Battery Power




Step 11

Connect to the MOST and the Power plugs to the rear **UMI** panel

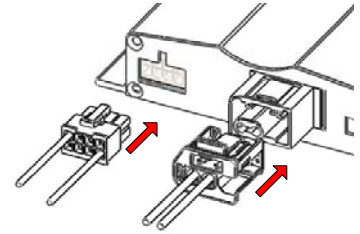

Step 12

Connect the USB and the microphone plugs to the front panel of the **UMI**



Step 13

If the **Portable Audio** device tab is not present or grayed out on the display contact the dealer to setup the Jaguar vehicle to accept portable audio system

U
M
I

Product
Information

mCAR

Installation Kit includes:

- mCAR, UMI module
- 2+4 MOST Harness
- MOST inline connector
- Power Supply Harness
- USB Extension Cable
- Cigarette lighter grommet
- Microphone w/ 2.5mm jack
- Velcro/Adhesive Pad

FCC ID:

TQ6BTMDC751

Weight: 350g

Size: 6" x 9" x 2"

mCAR Product References

This device contains FCC ID TQ6BTMDC751